

Using Adaptor Jaws you can press up to 108 stainless!

# Take On Big & Small

Designed for your next job no matter the size the **Novopress ACO203-XL Press Tool: 15 - 108mm.**

**Copper Press-Fit**

**Install Copper**  
Copper Press-Fit up to DN100

**PEX Crimp**  
Water & Gas

**Install PEX**  
PEX Crimp up to 50mm

**Stainless Press-Fit**

**Install Stainless**  
SS 316 Press-Fit up to 108mm




**Made in Germany**  
Manufactured & Engineered

**32kN**  
press force


**More Power**  
32kN Press Force



**18V Battery**  
Milwaukee Battery

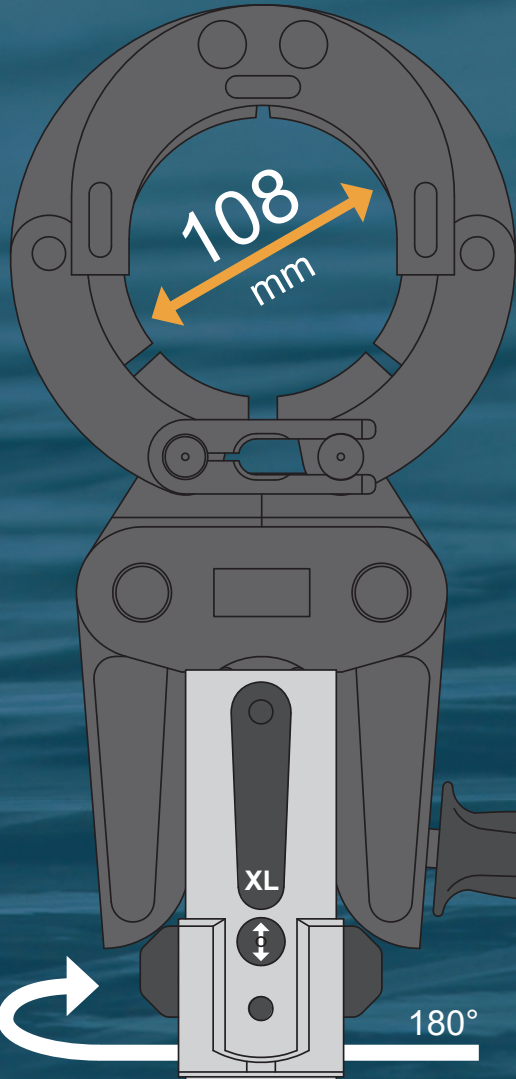

Compatible with **LARGE Press Jaws** from:  
Viega, Kembla, Rothenberger & Blucher

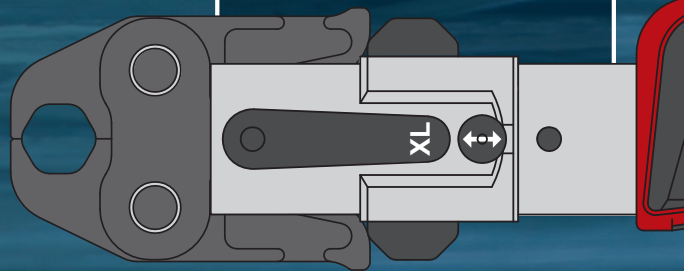

- One Button Start
- Contoured Soft Grip
- Brushless Motor
- USB Data Point
- 18V, 3.0A Milwaukee Battery

- ACO203-XL Tool  
- 2x 18V Battery  
- Battery Charger  
- Carry Case

Available as a Skin option or Kits!

Contact us for more and technical information.

[www.blucher.com.au](http://www.blucher.com.au)



**BLUCHER**  
Australia



**32kN**  
press force

Available from:

**BLUCHER Australia**  
Drainage and pressure piping systems

Phone: (08) 8374 3426  
Email: blucher@blucher.com.au  
Web: www.blucher.com.au

And selected local plumbing store distributors across Australia.


## ACO203-XL Tool & Jaw Compatibility Chart

### Stainless 316 Metric Press-Fit: Jaw & Collar System Compatibility


Brand	Supplier	Profile	15mm	22mm	28mm	35mm	ZB203	ZB221	ZB222
			Jaw	Jaw	Jaw	Jaw	Adaptor Jaw	Adaptor Jaw	Adaptor Jaw
Jaw Product No >			VT.PKM.015	VT.PKM.022	VT.PKM.028	VT.PKM.035	NP.ZB203	NP.ZB221	NP.ZB222
Kit Product No >			-	-	-	-	-	NP.45818-50 (includes case).	
Blucher Press-Fit	Isotubi	M	✓	✓	✓	✓	✓	✓	✓
Brand	Supplier	Profile	42mm	54mm	76.1mm	88.9mm	108mm		
			Collar	Collar	Collar	Collar	Collar		
Adaptor Jaw (sold separately) >			Use with ZB203			Use with ZB221		Use both ZB221 & ZB222	
Collar Product No >			-	-	NPCOL.076.KIT	NPCOL.088.KIT	NPCOL.108.KIT		
Kit Product No >			VT.PKM4254.SET (incl ZB203 Adaptor Jaw)			NPCOL.076.088 (only collars and case)		-	
Blucher Press-Fit	Isotubi	M	✓	✓	✓	✓	✓	✓	✓

**Retract Peg & Guard**  
Slide the guard down to fit ZB221 & ZB222 Adaptor Jaws.

Peg In: 15 - 54mm  
Peg Out: 76.1mm +



**Press Jaw**  
Insert into 32kN tool directly.



**Press Collar**  
Use the noted Adaptor Jaw type between Collar and the Press Tool.

Note: Adaptor Jaws sold separately unless noted as included.

### Stainless 316 IPS Press-Fit: Jaw & Collar System Compatibility

Brand	Supplier	Profile	1/2" IPS	3/4" IPS	1" IPS	1.1/2" IPS	2" IPS
			Jaw	Jaw	Jaw	Collar	Collar
Jaw Product No >			-	-	-	NPCOL.IPS.040	NPCOL.IPS.050
Blucher Press-Fit	Isotubi	M	✓	✓	✓	✓	✓

### Copper Press-Fit: Jaw & Collar System Compatibility

Brand	Supplier	DN15	DN20	DN25	DN32	DN40	DN50	DN40	DN50	DN65	DN80	DN100
		Jaw	Jaw	Jaw	Jaw	Jaw	Jaw	Collar	Collar	Collar	Collar	Collar
Use Collars with ZB203 Adaptor Jaw (sold separately)												
B-Press	Reece	VT.PKC.015	VT.PKC.020	VT.PKC.025	VT.PKC.032	RB.3000.040	RB.3000.050			NP.PKC.065	NP.PKC.080	NP.PKC.100
Press Plus	Plumbing Plus	VT.PKC.015	VT.PKC.020	VT.PKC.025	VT.PKC.032	RB.3000.040	RB.3000.050			NP.PKC.065	NP.PKC.080	NP.PKC.100
Viega	Tradelink	VT.PKC.015	VT.PKC.020	VT.PKC.025	VT.PKC.032	RB.3000.040	RB.3000.050			NP.PKC.065	NP.PKC.080	NP.PKC.100
KemPress Copper	Kembla	VT.PKC.015	VT.PKC.020	VT.PKC.025	VT.PKC.032	MW.PKSA.040	MW.PKSA.050	VT.PKC.040C	VT.PKC.050C	NP.PKC.065	NP.PKC.080	NP.PKC.100

>> Save & Combine >> Copper Jaw & Collar Kits are also available!

### PEX Water Press Systems: Jaw & System Compatibility

### PEX Gas Press Systems: Jaw & System Compatibility

Profile	15mm	16mm	18mm	20mm	22mm	25mm	28mm	32mm	40mm
U	VT.PKU.016	VT.PKU.016	-	VT.PKU.020	-	VT.PKU.025	-	VT.PKU.032	VT.PKU.040
TH	-	VT.PKTH.016	-	VT.PKTH.020	-	VT.PKTH.025	-	VT.PKTH.032	-
PEX	VT.PKI.016	VT.PKI.016	VT.PKI.016	VT.PKI.020	VT.PKI.022	VT.PKI.025	VT.PKI.028	-	-
AP	-	VT.PKAP.016	-	VT.PKAP.020	-	VT.PKAP.025	-	-	-

Please contact us to confirm the suitability of jaw with the PEX system you are installing.

**Please Note:**

All items sold separately & subject to availability. Warranty does not extend to tool or the system being installed. Installation must follow the manufacturer's recommended & technical instructions for the system and tool. Information supplied as a guide only and may change at anytime without notice.